

Replacement arm for

- high rims
- V brake
- Magura

Protective sticker

Cable clamp

Protect rubber

1 Wega complete

4 Threaded strap (Reserve)

2 Custom wrench



Preparation:

a

Add protect rubber

b

Add cable clamp

c

Add protective sticker

Always use a protective sticker(c) on the generator!
Check correct alignment and tight fit before cycling!
Don't use on wheels with magnetic rim joint*!
(Magnetic rim joint can lead to premature damage.)
Keep away from magnet sensitive devices!




Magnic Light is a registered trademark. Patent Status: Granted

* Detailed Manual



<https://www.magniclight.com/wega>

Thank you for your contribution to environmentally conscious and safe cycling with our magnetic, no-battery bike lights! Without the support of our customers, we would not have been able to develop this new technology. We look forward to your feedback and suggestions for us and the cycling community. Feel free to share your opinion wherever you like and at www.magniclight.com/feedback

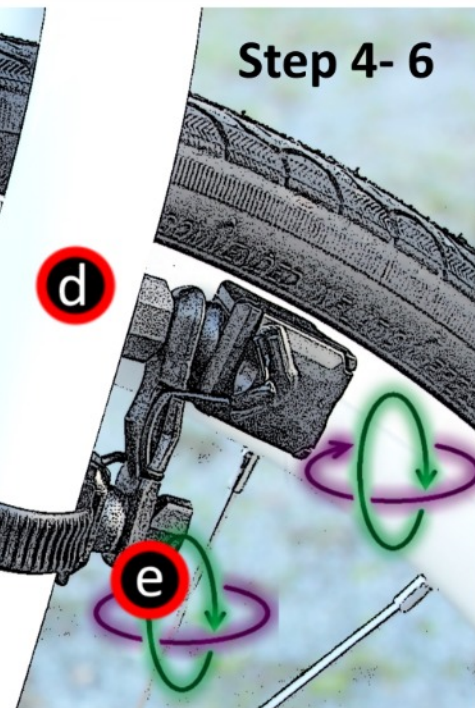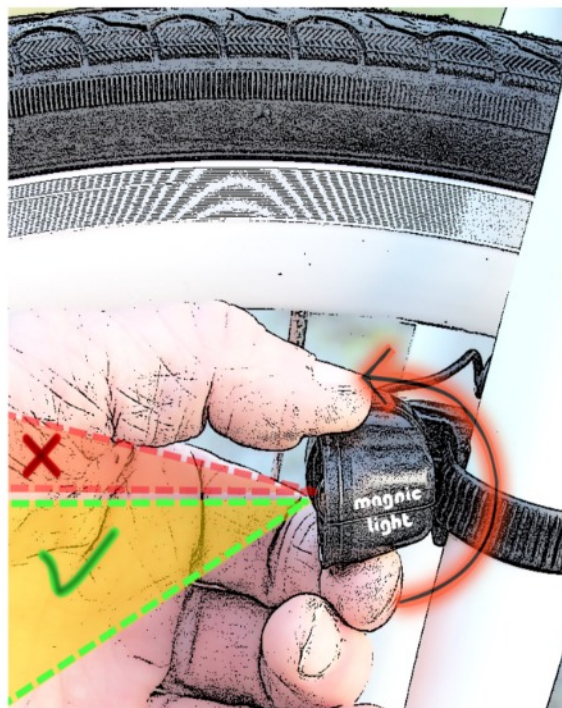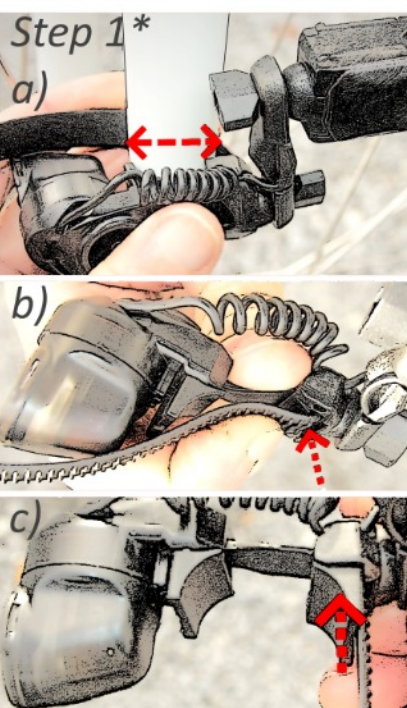

1. Open the threaded strap (pull out the screw) and attach the lamp to the fork.

1*. For thin and oval forks pre-bend the strap:

a) Adjust length directly at the fork. b) Bend strap in the bracket. c) Enter protect rubber in bracket.

2. Tighten the threaded strap firmly with the custom wrench(2).

3. Draw end of the strap bent down into the clamp(b) and snap the clip of the clamp in to place.

4. Align the generator parallel to the rim: adjust exactly horizontally and vertically!

Small rim distance (~ 1mm) increases the performance significantly.

5. Tighten the wing nut(d) firmly, **tighten the wing nut(e) very firmly!**

6. Align the light beam at a slight downward angle (Adjust the rear light accordingly).

Magnic Innovations GmbH & Co KG

Lohkamp 5

33829 Borgholzhausen

Germany

www.magniclight.com

[mail:info@magniclight.com](mailto:info@magniclight.com)

